

Project
Item
Quantity
FCSI Section
Approval
Date



Broaster® Perfect Hold™ Deli Case





Standard Features

- User-friendly design available in countertop and stand-alone versions.
- Unique front glass design pivots down for easy cleaning.
- Rollerless sliding glass doors easy to clean.
- Mechanical timers track holding time for each row of pans to maintain optimum holding times.
- Rheostats allow full range of light control for each zone.
- Simplified controls offer uniform warming of foods.
- Euro-look design provides excellent visual presentation and appeal.
- Waterless system eliminates plumbing requirements and expense.

- Recessed electrical upper controls - reduce potential damage risks.
- Single main power switch allows for easy start-up and shut-down.
- Attractive Broaster color scheme - reinforces brand image of quality with Broaster Express® or Genuine Broaster Chicken® logo (on complete deli cases).
- Optional built-in backlit graphics - standard Broaster Express® or Genuine Broaster Chicken® graphics panel on complete deli cases can be backlit with optional 3-bulb fluorescent light unit.









Specifications

Model HDM-4 deli case with single shelf display area is stainless steel and tempered glass construction. Includes bottom-hinged drop-down front access glass display panel for easy loading and cleaning. Upper housing is air-cooled and includes 3 lighted 12" x 26" display zones. Each zone has recessed rheostats for full-range adjustment of display lighting and 3 individual timers to maintain optimum holding times. Model HDM-6 includes 5 display zones.

Rear access doors are of tempered glass and lightweight aluminum channel construction. There are rollerless upper and lower nylon guides for lift-out loading and cleaning.


A master power supply switch and zoned temperature control systems help maintain safe product temperature. Primary heat is provided below the food display by a recessed serpentine tubular metal sheathed element with dedicated thermostatic control. Lower heat system is water free with no plumbing required.

Additional specification for "Complete Deli Case":

Deli Case is fixed to free-standing metal module of equal width. It includes rear cutting board and front graphic insert.

Broaster Company | 2855 Cranston Road, Beloit, WI 53511-3991 USA | 1.800.365.8278 | 1.608.365.0193 | broaster.com

Broaster® Perfect Hold™ Deli Case

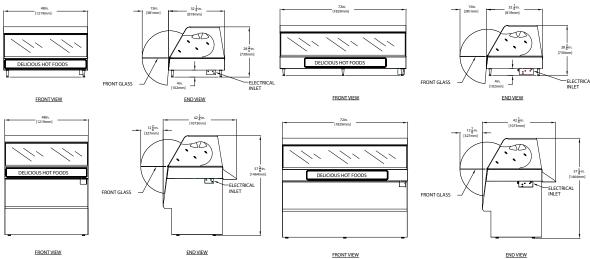

Specifications

Model	W x D x H includes 4" (102 mm) legs	Pan Capacity	Volts	Hz	Watts	Amps	Wiring/ Phase	Net/Ship Weight lbs. (kg)
		HDM-4 • 4 Fo	ot Complete De	i Case				
85918 85919 (backlit)*	48" x 42-1/4" x 57-5/8" (1219 mm x 1073 mm x 1464 mm)	(3) 12" x 20" pans plus (3) 12" x 6" pans	120/240	60	2900 2975	15 16	4-wire grounded, 1PH	510/550 lbs. (231/250 kg)
85916 85917 (backlit)*	48" x 42-1/4" x 57-5/8" (1219 mm x 1073 mm x 1464 mm)	(3) 12" x 20" pans plus (3) 12" x 6" pans	120/208	60	2900 2975	16 17	4-wire grounded, 1PH	510/550 lbs. (231/250 kg)
		HDM-6 • 6 Fo	ot Complete De	li Case				
85923 85924 (backlit)*	72" x 42-1/4" x 57-5/8" (1829 mm x 1073 mm x 1464 mm)	(5) 12" x 20" pans plus (5) 12" x 6" pans	120/208	60	4500 4575	16 17	5-wire grounded, 3PH	700/750 lbs. (318/340 kg)
85925 85926 (backlit)*	72" x 42-1/4" x 57-5/8" (1829 mm x 1073 mm x 1464 mm)	(5) 12" x 20" pans plus (5) 12" x 6" pans	120/240	60	4500 4575	15 16	5-wire grounded, 3PH	700/750 lbs. (318/340 kg)
85921 85922 (backlit)*	72" x 42-1/4" x 57-5/8" (1829 mm x 1073 mm x 1464 mm)	(5) 12" x 20" pans plus (5) 12" x 6" pans	120/208/240	60	4500 4575	26 27	4-wire grounded, 1PH	700/750 lbs. (318/340 kg)
		HDM-4 ● 4 Foo	t Counter Top D	eli Case				
85703	48" x 32-1/4" x 28-3/4" (1219 mm x 819 mm x 730 mm)	(3) 12" x 20" pans plus (3) 12" x 6" pans	120/240	60	2900	15	4-wire grounded, 1PH	310/350 lbs. (141/159 kg)
85709	48" x 32-1/4" x 28-3/4" (1219 mm x 819 mm x 730 mm)	(3) 12" x 20" pans plus (3) 12" x 6" pans	120/208	60	2900	16	4-wire grounded, 1PH	310/350 lbs. (141/159 kg)
		HDM-6 • 6 Foot	t Counter Top D	eli Case				
85754	72" x 32-1/4" x 28-3/4" (1829 mm x 819 mm x 730 mm)	(5) 12" x 20" pans plus (5) 12" x 6" pans	120/208	60	4500	16	5-wire grounded, 3PH	510/550 lbs. (231/250 kg)
85756	72" x 32-1/4" x 28-3/4" (1829 mm x 819 mm x 730 mm)	(5) 12" x 20" pans plus (5) 12" x 6" pans	120/240	60	4500	15	5-wire grounded, 3PH	510/550 lbs. (231/250 kg)
85758	72" x 32-1/4" x 28-3/4" (1829 mm x 819 mm x 730 mm)	(5) 12" x 20" pans plus (5) 12" x 6" pans	120/208/240	60	4500	26	4-wire grounded, 1PH	510/550 lbs. (231/250 kg)

^{*} includes 3-bulb fluorescent light unit (for backlighting the graphics panel on complete deli cases)

All units are supplied without power cords.

Accessories & Options Available

- □ Protective light guards 3 guards for 4' and 5 guards for 6' cases
- □ Decorative branded insert trays
- □ Half and full-length middle storage shelves
- $\hfill\Box$ Durable black plastic or stainless steel pans in 12" x 6" x 2", 12" x 10" x 2", 12" x 20" x 2", 12" x 6" x 4", 12" x 10" x 4", and 12" x 20" x 4" sizes

Broaster Company | 2855 Cranston Road, Beloit, WI 53511-3991 USA | 1.800.365.8278 | 1.608.365.0193 | broaster.com

92628 RevD 12/14